

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/66, H04Q 7/24	A1	(11) International Publication Number: WO 99/14910 (43) International Publication Date: 25 March 1999 (25.03.99)
(21) International Application Number: PCT/SE98/01552 (22) International Filing Date: 1 September 1998 (01.09.98) (30) Priority Data: 08/931,624 16 September 1997 (16.09.97) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: LINDGREN, Magnus; Lövgatan 2, S-582 45 Linköping (SE). WIKSTRÖM, Claes; Mänkenet, Gästads, S-582 75 Linköping (SE). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: NETWORK HUB FOR INTERCONNECTING A WIRELESS OFFICE ENVIRONMENT WITH A PUBLIC CELLULAR TELEPHONE NETWORK (57) Abstract A network hub (38) for interconnecting a first network (40) transceiving signals according to a SS7 protocol with a second network (12) transceiving signals according to a TCP/IP protocol is disclosed. The network hub (38) includes means for interconnecting the hub (38) with each of the first and second networks. A processing means within the hub converts received signals between being carried by the SS7 and TCP/IP protocols. The conversions are assisted by a translation table (70) including active mobile identification numbers and IP addresses within the second network and a second table (72) listing all signal point codes for nodes within the first network.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

**NETWORK HUB FOR INTERCONNECTING
A WIRELESS OFFICE ENVIRONMENT WITH A
PUBLIC CELLULAR TELEPHONE NETWORK**

5 **BACKGROUND OF THE INVENTION**

Technical Field of the Invention

The present invention relates to the interconnection of wireless office environments with a public cellular telephone network, and more particularly, to a network hub providing for transmission of messages from the hub to the public
10 cellular telephone network using the SS7 protocol and the transmission of messages from the hub to the wireless office environment using the TCP/IP protocol.

Description of Related Art

Public access cellular telephone systems are currently available for use throughout the world. As a result of the success of such systems in providing mobile
15 telecommunication services to the public, considerable interest has arisen in the corporate sector to provide a wireless communication feature add on to conventional private wireline telephone systems. Such a feature is typically implemented through the use of a private cellular telephone system.

Due to the costs of mobile terminals, it is preferable in any private cellular
20 telephone system established by a business to utilize the same type of mobile terminals as are used within public access cellular telephone systems. Furthermore, because many employees already own mobile terminals and have subscriptions with a public access telephone system, it is preferable that the utilized mobile stations be capable of operating with and between each of the systems. At a minimum, this requires that the
25 private cellular telephone system operate within the same cellular frequency band as the public access cellular telephone system, and use the same type or compatible switching equipment and base stations. It is also likely that the radio frequency coverage regions of the private cellular telephone system and the public access cellular telephone system may at least partially overlap. Furthermore, the private cellular
30 telephone system and the public access cellular telephone system must communicate with each other regarding the servicing of mobile stations, the allocation of channels

-2-

(frequencies) for communication, the routing of communications, and the handing off of mobile station communications.

It is preferred that the wireless offices be connected to an existing home location register (HLR) of the cellular network to enable automatic roaming between the cellular network and the wireless office. As the popularity of wireless offices increases, each new wireless offices must be connected to the signaling system no. 7 (SS7) network that forms the backbone of existing public access cellular telephone systems. Each additional connection of a wireless office adds an additional node to the cellular network and requires a great deal of work to update each node within the cellular network with knowledge of a new wireless office node. This work level is repeated by each wireless office that is added to the network creating a huge task for the cellular network provider.

Furthermore, when a private network is added as a node to the public access cellular telephone system, the wireless office nodes will not be owned by the cellular network providers. This raises several security concerns, and cellular network operators are not keen on adding nodes that are not under their total control. Nodes not controlled by the cellular network provider raise a serious security risk due to unscrupulous third parties access to the private nodes. Additionally, nodes not under the control of the cellular network operators may often be restarted which raises the number of management messages which must be transmitted by the network. Thus, a great many problems and concerns arise in the direct connection of a number of new wireless office nodes directly to a public access cellular network.

SUMMARY OF THE INVENTION

The present invention overcomes the foregoing and other problems with an improved communications system utilizing a network hub. A first public access cellular telephone network operates according to the signaling system no. 7 (SS7) protocol for transmitting signals between various nodes and the public access network. A second communications system comprises a TCP/IP network utilizing the TCP/IP protocol. The second network is interconnected with a plurality of private wireless networks and transmits signals via the TCP/IP protocol.

-3-

A network hub interconnects the first and second communications networks and enables the transfer of signals therebetween. The network includes processing means for converting signals from being carried by the SS7 protocol to the TCP/IP protocol and vice versa. This is accomplished by replacing the MTP and SSCP layers of an SS7 protocol signal with a TCP/IP layer for transmissions from the SS7 network to the TCP/IP network, and for replacing a TCP/IP layer with MTP and SSCP layers for transmissions from the TCP/IP network to the SS7 network.

A translation table within the network hub enables the location of mobile stations being served by wireless networks connected to the network hub to be determined. The translation table includes the mobile identification numbers of registered mobile stations. Each mobile identification number entry further includes an associated IP address for the wireless network serving the mobile station. This enables calls from the public network to be directed to the wireless office serving a mobile station. An American Cellular Network address table provides the signaling control points (addresses) for all nodes within the public access cellular telephone network. This enables transmissions from the wireless networks to be directed to any location within the public access cellular telephone network once the communication reaches the network hub.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference is made to the following detailed description taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a schematic diagram of a public access cellular telephone network;

FIGURE 2 is a schematic diagram of a wireless communication system including a wireless office environment private cellular telephone network, a public access cellular telephone network and a network hub for interconnecting the public and private networks;

FIGURES 3a and 3b illustrate the signaling system no. 7 (SS7) protocols and TCP/IP protocols for transporting IS-41 messages according to the present invention;

-4-

FIGURE 4 is a signal flow and node operation diagram illustrating the adding of a mobile to a translation table within the network hub;

FIGURE 5 is a signal flow and node operation diagram illustrating the receipt of a message from the HLR by the wireless office/VLR; and

5 FIGURE 6 is a signal flow and node operation diagram illustrating the removal of a mobile identification number from the translation table of the network hub.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to the Drawings, and more particularly to FIGURE 1, there is illustrated a schematic diagram of a public access cellular telephone network 12 (such as a known public land mobile network - PLMN). The public access cellular telephone network 12 includes a plurality of interconnected switching nodes 14 commonly referred to as mobile switching centers (PLMN-MSCs) 14. Although only three mobile switching centers 14 are shown, it will be understood that the system 12 likely includes many more interconnected nodes. The mobile switching centers 14 may comprise any one of a number of known telecommunication switching devices, including those commonly used and known in the art of providing either digital or analog cellular telephone services to a plurality of mobile stations (not shown).

The mobile switching centers 14 are interconnected with each other for communications via both voice trunks and signaling links 20 together providing a known ISUP (RI or RII) type connection. The trunks provide voice and data communication paths used to carry subscriber communications between the mobile switching centers 14. The signaling links 20 carry command signals (such as IS-41 or other signaling system no. 7 (SS7) messages) between the mobile switching centers 14. These signals may be used, for example, in setting up and tearing down voice and data communication links over the voice trunks and controlling the provision of calling services to mobile stations.

The mobile switching centers 14 are also connected to data bases comprising a home location register (PLMN-HLR) 22 by means of signaling links 20 providing a known MAP type connection (IS-41, MAP for GSM, MAP for PDC, or other SS7 type connection). The HLRs 22 store data for each mobile station, including the location of the mobile station, which comprises a direct or indirect SS7 address

-5-

(signaling point code) to the VLR (or VLR/MSC) where the mobile station last provided a registration.

Since each node is a part of the SS7 network, the nodes will further include associated signaling points (SP) 24 and signaling transfer points (STP) 26. Within an
5 SS7 network each node essentially comprises a signaling point 24. Signaling transfer points 26 provide packet switching of IS-41 message based signaling protocols within the SS7 network.

The VLRs of FIGURE 1 are illustrated as being co-located with the MSCs 14. However, it should be realized that the VLRs may comprise separate logical nodes
10 located at a different position within the network. The VLRs includes a listing of mobile station mobile identification numbers currently registered within the service area of the associated MSC 14. For routing purposes, all of the VLRs include a table 30 of all nodes included within the network. The table 30 enables mapping of the mobile identification number (MIN) of a mobile station to the address of the HLR with
15 which the mobile station is associated when the used mobile station registers with the VLR.

Referring now to FIGURE 2, there is illustrated the present invention wherein a network hub 38 is utilized to interconnect a public access cellular telephone network
20 12 with wireless office environment (private cellular telephone system) 40. The network hub 38 is capable of operating in systems using IS-41 signaling, MAP for GSM signaling, MAP for PDC signaling or other types of SS7 signaling. For purposes of discussion, the following description shall be with respect to a system using IS-41 signaling but it should be realized that the system is applicable to systems using other types of signaling. The public access cellular telephone network 12
25 consists of a number of mobile switching centers 14 and home location registers 22 which are interconnected with the network hub 38 via the SS7 signaling protocol links 20 and associated signaling points 25 and signaling transfer points 26 as described previously with respect to FIGURE 1.

Communications between the network hub 38 and the public access cellular
30 network 12 are accomplished through the exchange of IS-41 messages 50 using well-known SS7 messaging protocols as illustrated in FIGURE 3A. According to this protocol, the signal connection control part (SCCP) layer 52 is used with the message

-6-

transfer part (MTP) layer 54 to route transaction capability application part (TCAP) layer 56 formatted IS-41 messages 50 from the network hub 38 to HLR 22 and MSC 14 nodes within the public access cellular telephone system 12. The TCP/IP network 45 connecting the wireless offices 40 to the network hub 38 is not capable of providing a transport medium for IS-41 messages in accordance with the SS7 messaging protocols. The SCCP layer 52 and the MTP layer 54 thus cannot be used for end-to-end routing of the TCAP layer 56 formatted IS-41 messages 50.

In accordance with the present invention, as illustrated in FIGURE 3B, the TCP/IP layer 60 replaces the MTP layer 54 and the SCCP layer 52 of the SS7 protocol while the TCAP layer 56 remains intact for transportation of the IS-41 messages 50. To allow communications between the TCAP layer 56 and the TCP/IP layer 60, an adaptation layer 58 must exist between the TCAP layer and the TCP/IP layer. The adaptation layer 58 acts as a translation interface between the different protocols. The conversion between transportation of the IS-41 messages 50 by the SS7 protocol or the TCP/IP protocol is performed by processing means within the network hub 38 and enables interconnection of the public network 12 to the wireless offices 40. The network hub 38 includes an IP address for communications using the TCP/IP protocol and a signal point code (address) for communications with respect to the SS7 protocol.

The network hub 38 further includes a translation table 70 for storing the mobile identification numbers (MIN) of mobile stations 41 being serviced by a wireless office 40 interconnected with the network hub 38. Associated with the stored MIN are the IP address of the wireless office 40 in which a mobile station is registered. The translation table 70 enables the location of mobile stations according to the IP address of its serving wireless office 40. A network table 72 is also included within the hub 38 and includes a listing of all nodes and signaling point codes (addresses) within the public access cellular network 12. The table 72 also includes a list of all mobile identification numbers and their corresponding HLR. The Network table 72 enables location and addressing of messages to all nodes in the public cellular telephone network 12.

As an interface between the public access cellular telephone network 12 and the wireless offices 40, the network hub 38 will include a signaling point code (address) and an IP address. Nodes within the public access cellular telephone

-7-

network 12 will see the network hub 38 as a single node within the public access cellular telephone system and access the hub by the signaling point code. Thus, additions of wireless offices 40 to the hub 38 does not require additional maintenance for updating nodes within the public access telephone network 12 since the wireless office does not comprise a new node.

The network hub 38 may also include functionalities to enable restriction of the total number of active users within a wireless office or to restrict particular users from accessing a wireless office. In this manner, the network hub 38 will be able to act as a firewall between the SS7 (public) network and the wireless office (private) networks to provide security along with the reliability of the SS7 network.

While the network hub 38 within the foregoing description has been illustrated as a separate node, it should be realized that the hub is a logical node which may be physically co-located with other cellular nodes such as an HLR, VLR, MSC or a wireless office. Furthermore, while the foregoing description has been made with respect to the public access cellular system using a SS7 network, it is also possible to utilize an X.25 network in place of the SS7 network.

Referring now to FIGURE 4, there is illustrated a signal and node diagram illustrating the process for when the Network hub 38 receives a registration of a mobile station 41 from a wireless office 40. The mobile station 41 transmits a registration message 100 to the wireless office/VLR 40 within whose service area the mobile station is currently located. The wireless office 40 forwards the registration request message 102 to the Network hub 38. In response to receipt of this message 102, the Network hub 38 adds the mobile identification number of the mobile station 41 to the translation table 70 within the hub together with the IP address of the wireless office 40 forwarding the message. The network hub 38 then utilizes the Network table 72 to determine the address of the home location register 22 (also identified in the registration request message) of the mobile station 41 and forwards the registration request message 104 to the HLR such that the location and status of the mobile station 41 may be updated by the HLR. Responses (106, 108, 110) are then returned to the network hub 38, wireless office 40 and mobile station 41.

Referring now to FIGURE 5, there is a signal and node diagram illustrating the receipt by the network hub 38 of a message from the HLR 22 via the SS7 network for

-8-

the wireless office 40. The HLR 22 generates an IS-41 message 112 to the wireless office/VLR 40, for example, the roaming routing request message. The destination address of the roaming routing request 112 is the signaling point code (address) of the network hub 38 within the SS7 network. Upon delivery of the roaming routing request 112 to the network hub 38, the hub utilizes the mobile identification number stored within the message in accordance with IS-41 protocol standards to find the IP address of the wireless office with which the mobile station associated with the mobile identification number is registered. This is accomplished by accessing the translation table 70. The roaming routing request is then forwarded to the identified IP address at 114. The wireless office 40 provides a response to the request at 116 to the Network hub 38, and the hub 38 forwards the response to the HLR 22 at 118.

Referring now to FIGURE 6, there is illustrated the receipt by the network hub 38 of a message indicating that the mobile station 41 is no longer registered with the wireless office. The HLR 22 initially generates a registration cancelization message 120 to the network hub 38. At the network hub 38, the translation table 70 is utilized to find the IP address of the wireless office/VLR 40 associated with the mobile 41. The request cancellation is then forwarded to the wireless office at 122, and a response is received at 124. The network hub 38 then removes the mobile identification number for the mobile from the translation table 70 and notifies the HLR 22 of this at step 126. The network hub 38 could also remove the mobile identification number for the mobile 41 from the translation table 70, if the wireless office 40 sends an CCS-inactive message to the HLR 22. In this way, the updating of the translation table 70 is done automatically.

While the concept of the network hub 38 has been discussed with respect to the use of the hub as a bridge between an SS7 network and a wireless office, TCP/IP network, the hub could be useful in a variety of other applications. For example, the hub concept with automatic update of mobile registration is also applicable for the similar map protocols of GSM and PDC. The concept would also be useful for applications attempting to avoid the connection of several different types of small nodes, e.g., MSC/VLR to an SS7/CC7 network using an IP network. Similarly, the network hub concept would be useful for mapping between other types of protocols using E.164 type addressers (normal telephone numbers) to SS7 networks. For

-9-

example, if the WO/VLR is using ISDN, the network hub 38 could provide the bridge to the cellular network with the added advantage that the HLR is unaware of the ISDN type of bearer for the WO/VLR. Although a preferred embodiment of the method

5 Drawings and described in the foregoing Detailed Description, it is understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications, and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

-10-

WHAT IS CLAIMED IS:

1. A network hub, comprising:

means for interconnecting the network hub to a first network to transceive signals via a SS7 protocol;

5 means for interconnecting the network hub to a second network to transceive signals via a TCP/IP protocol; and

means for processing received signals to convert the signals between being carried by the SS7 protocol and the TCP/IP protocol.

10 2. The network hub of claim 1 wherein the means for processing further replaces MTP and SSCP layers of the SS7 protocol with a TCP/IP and adaptation layers for transmission from the first network to the second network.

3. The network hub of claim 1 wherein the means for processing further replaces a TCP/IP layer with MTP and SSCP layers for transmission from the second network to the first network.

15 4. The network hub of claim 1 further including a translation table used in association with the means for processing for mapping between SS7 signaling point codes and IP addresses.

5. The network hub of claim 4 wherein the means for processing further includes means for automatically updating the translation table in response to contacts
20 involving a particular mobile identification number.

6. The network hub of claim 1 further including a North American Cellular Network address table associated with the means for processing to enable transmission to nodes within the first network from the second network.

25 7. The network hub of claim 1 further including a translation table storing mobile identification numbers and an associated IP address for the wireless office

-11-

serving a mobile station associated with the mobile identification number for enabling transmissions from the first network to the second network.

8. A communications system, comprising:

5 a first communications network operating according to a SS7 protocol for transmitting signals;

a second communications network operating according to a TCP/IP protocol for transmitting signals;

a plurality of private wireless networks connected with the second communications network; and

10 a network hub for interconnecting the first communications network with the second communications network, the network hub converting received signals between being carried by the SS7 protocol and the TCP/IP protocol.

9. The communications system of claim 8 wherein the network hub further replaces MTP and SSCP layers of the SS7 protocol with a TCP/IP layer and
15 an adaptation layer for transmission from the first network to the second network.

10. The communications system of claim 8 wherein the network hub replaces a TCP/IP layer with MTP and SSCP layers for transmission from the second network to the first network.

11. The communications system of claim 8 wherein the network hub
20 further includes a translation table for mapping between SS7 signaling point codes and IP addresses.

12. The network hub of claim 11 wherein the means for processing further includes means for automatically updating the translation table in response to contacts involving a particular mobile identification number.

-12-

13. The communications system of claim 8 wherein the network hub further includes a North American Cellular Network address table to enable transmission to nodes within the first network from the second network.

5 14. The communications system of claim 8 wherein the network hub further includes a translation table storing mobile identification numbers and an associated IP address for the wireless office serving a mobile station associated with the mobile identification number for enabling transmissions from the first network to the second network.

10 15. The communications system of claim 8 wherein the plurality of private wireless networks are addressed from the first network via a single signaling point code associated with the network hub.

16. The communications system of claim 8 wherein the network hub further includes means for selecting which mobile stations may access one of the plurality of wireless networks.

15 17. The communications system of claim 8 wherein the network hub further includes means for limiting a total number of users which may access a wireless network.

18. A network hub, comprising:
means for interconnecting the network hub via a first network to
20 transceive signals via a SS7 protocol;
means for interconnecting the network hub with a second network to transceive signals via a TCP/IP protocol, the second network further connected to a plurality of private wireless networks;
a North American Cellular Network addressing table for locating
25 transmission end points within the first network;
a translation table for locating mobile stations served by wireless networks connected to the second network; and

-13-

means for processing received signals to convert the signals for carriage between the SS7 protocol and the TCP/IP protocol.

19. The network hub of claim 18 wherein the Network table further includes signaling point codes for all nodes in the first network.

5 20. The network hub of claim 18 wherein the translation table further includes mobile identification numbers active within connected wireless networks and IP addresses for the wireless networks where the mobile identification numbers are active.


10 21. The network hub of claim 18 wherein the means for processing further replaces MTP and SSCP layers of SS7 protocol with a TCP/IP layer and an adaptation layer for transmission from the first network to the second network.

22. The network hub of claim 18 wherein the means for processing further replaces a TCP/IP layer with MTP and SSCP layers for transmission from the second network to the first network.

This Page Blank (uspto)


1 / 4

FIG. 1

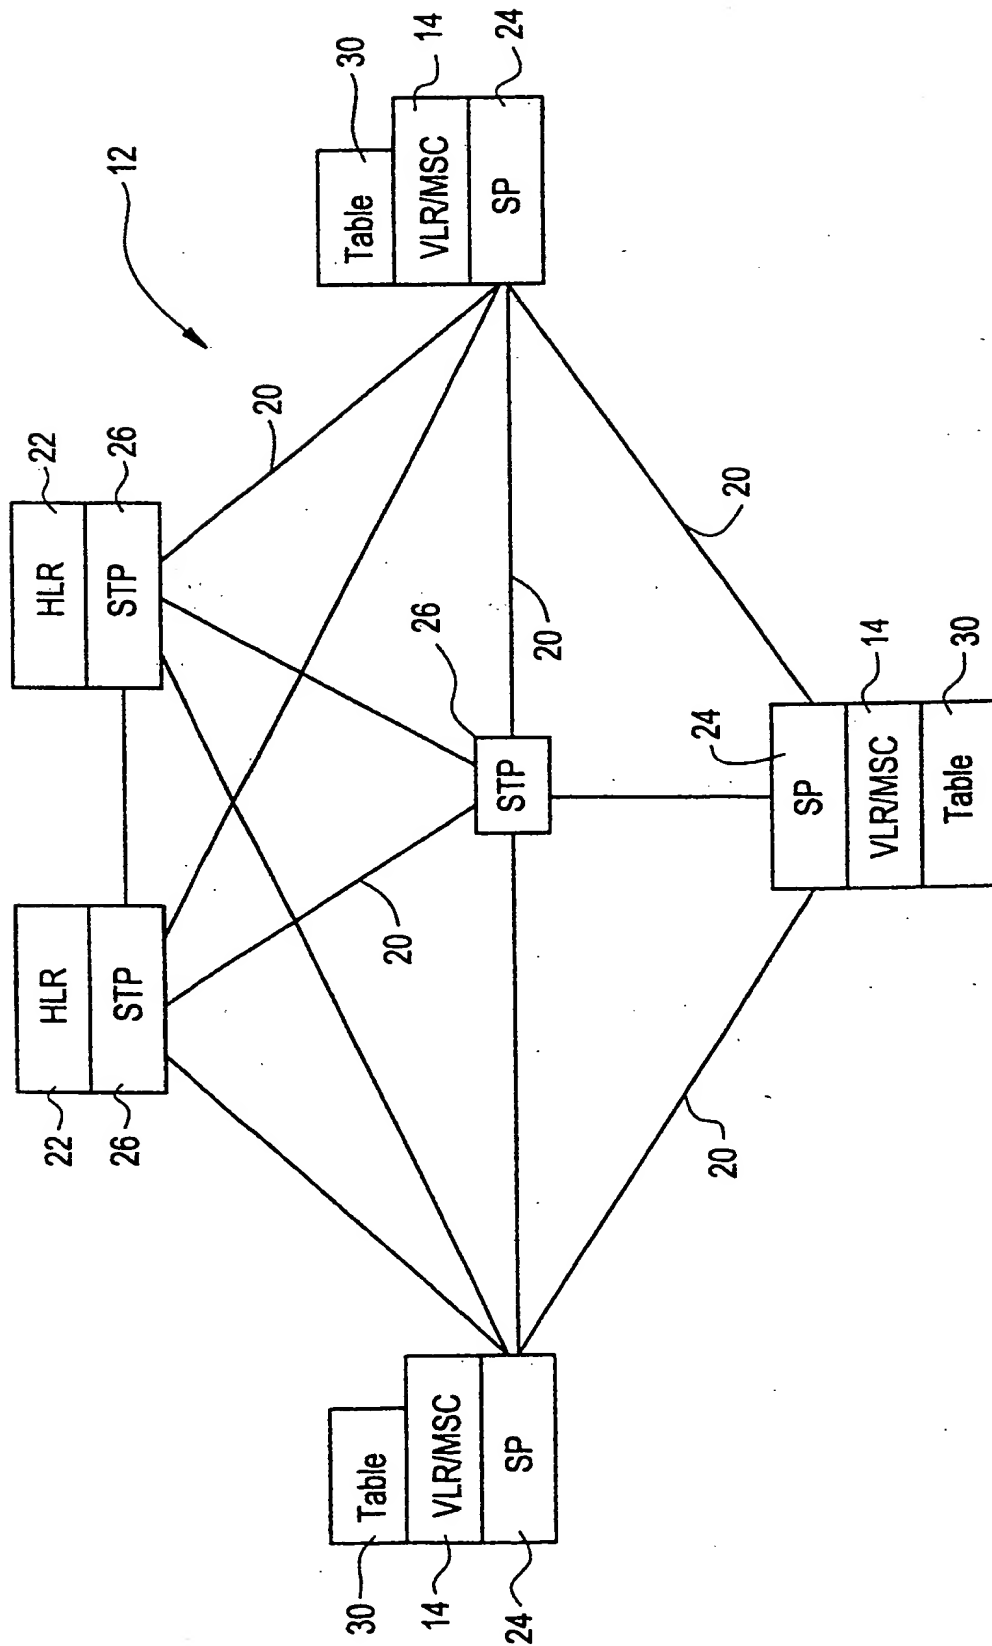

This Page Blank (uspto)

FIG. 2

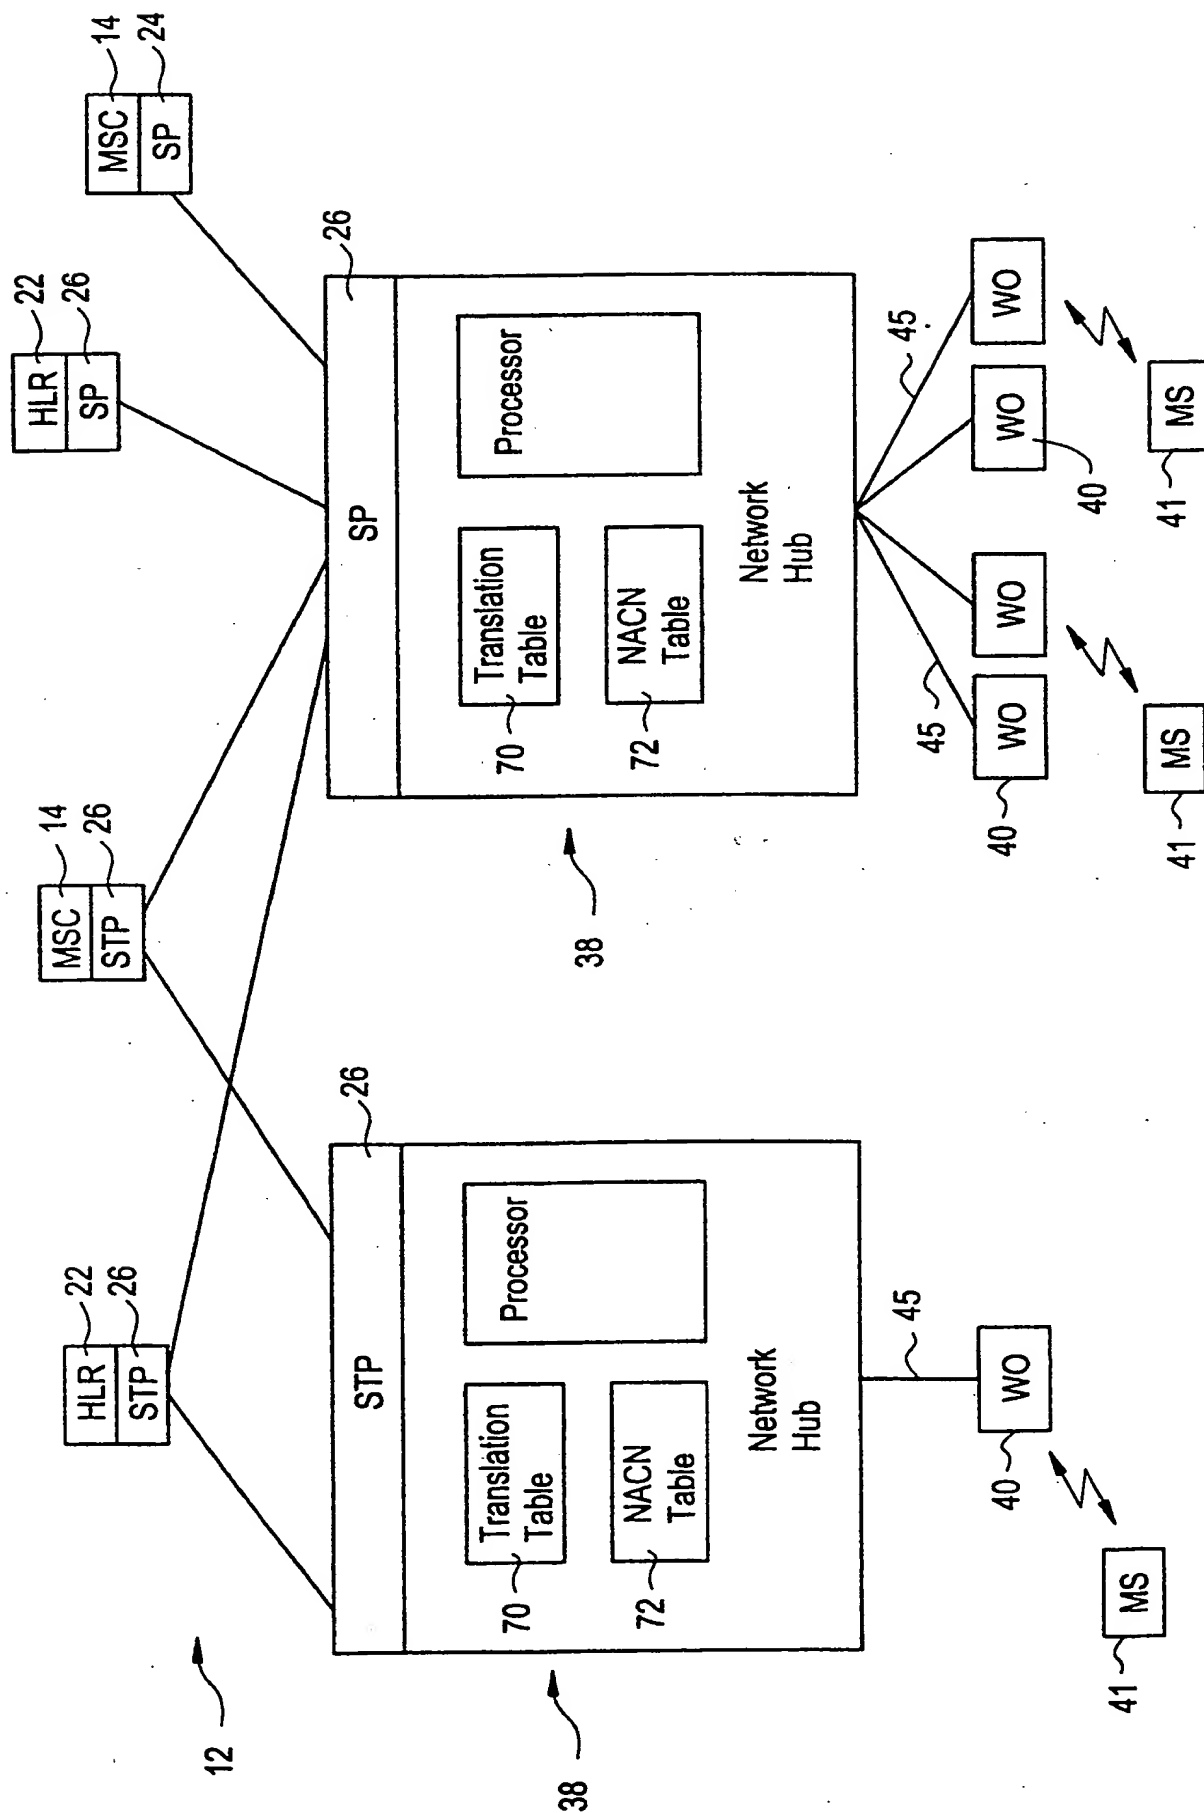

This Page Blank (uspto)

3 / 4

FIG. 3A




FIG. 3B




FIG. 4



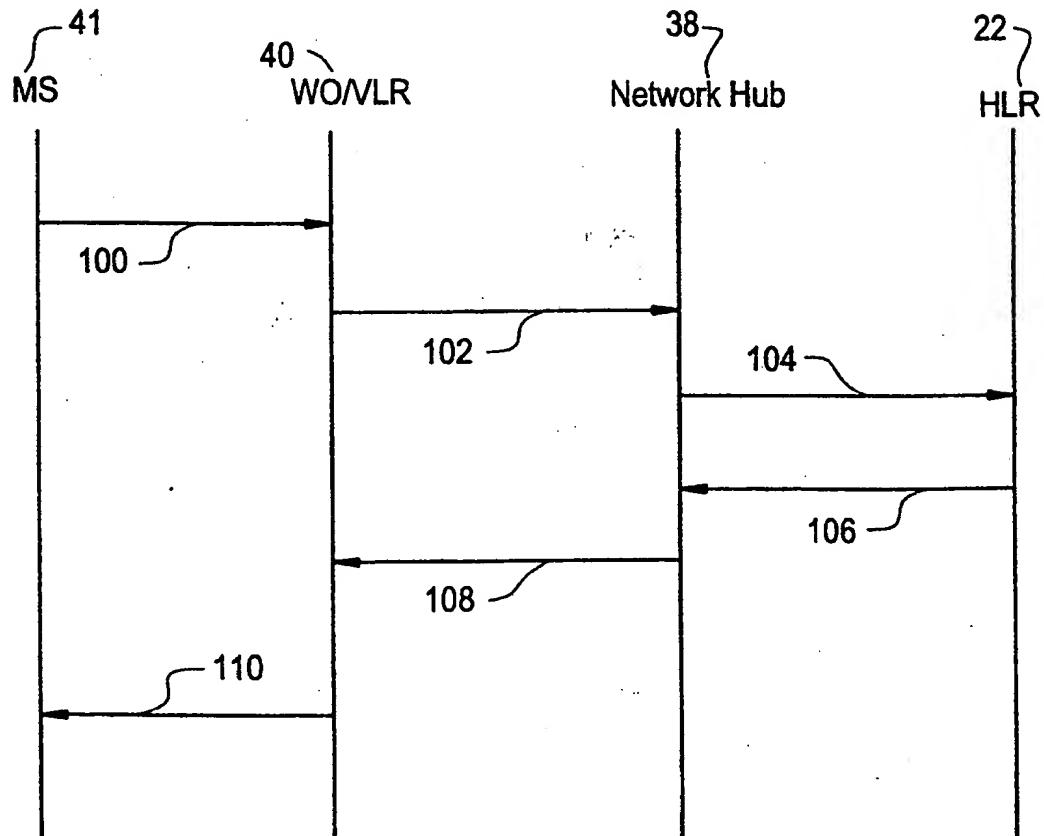


FIG. 5

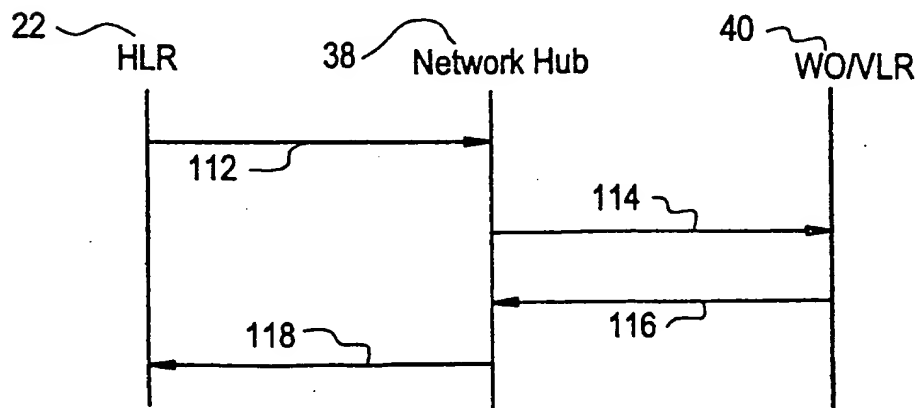

This Page Blank (uspto)

FIG. 6

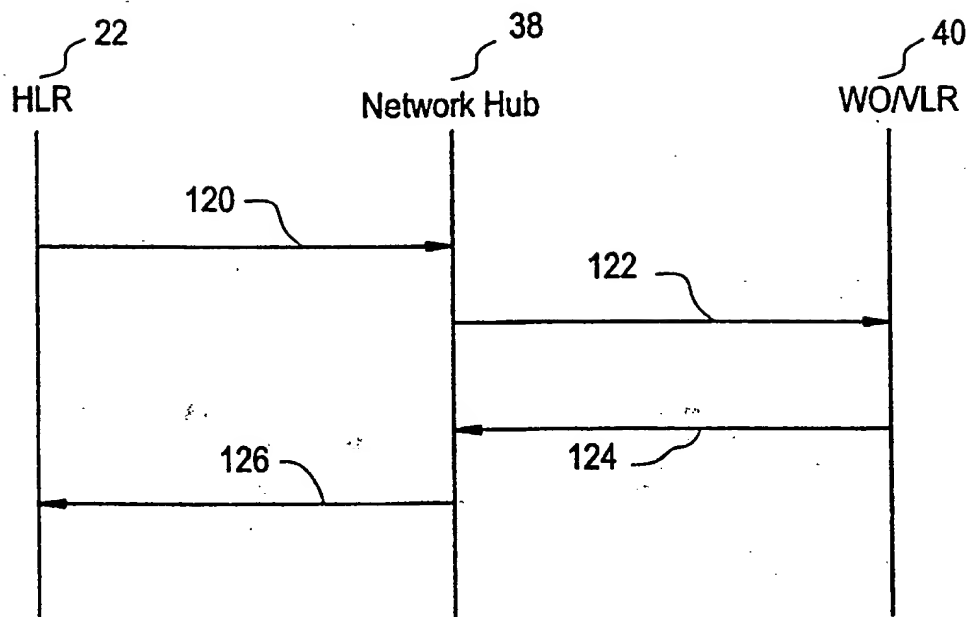

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01552

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L12/66 H04Q7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SEVCIK M ET AL: "CUSTOMERS IN DRIVER'S SEAT: PRIVATE INTELLIGENT NETWORK CONTROL POINT" ISS '95. WORLD TELECOMMUNICATIONS CONGRESS. (INTERNATIONAL SWITCHING SYMPOSIUM), ADVANCED SWITCHING TECHNOLOGIES FOR UNIVERSAL TELECOMMUNICATIONS AT THE BEGINNING OF THE 21ST. CENTURY BERLIN, APR. 23 - 28, 1995, vol. VOL. 2, no. SYMP. 15, 23 April 1995, pages 41-44, XP000495622 VERBAND DEUTSCHER ELEKTROTECHNIKER (VDE) ET AL	1-4,7
Y	see abstract	8-11
A	see page 42, right-hand column, line 4 - line 6 see page 42, right-hand column, line 19 - line 23 -/--	5,6, 12-15, 18-22



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

3 December 1998

Date of mailing of the international search report

15/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 551 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Perez Perez, J

INTERNATIONAL SEARCH REPORT

In: tional Application No

PCT/SE 98/01552

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p style="text-align: center;">---</p> <p>FRIDH D: "MOBITEX CONNECTIVITY" 1995 FOURTH IEEE INTERNATIONAL CONFERENCE ON UNIVERSAL PERSONAL COMMUNICATIONS RECORD, GATEWAY TO THE 21ST. CENTURY TOKYO, NOV. 6 - 10, 1995, no. CONF. 4, 6 November 1995, pages 649-651, XP000690032 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS see abstract see page 651, left-hand column, line 9</p>	8-11
A	<p style="text-align: center;">---</p> <p>EP 0 777 394 A (ALCATEL BELL NV) 4 June 1997 see column 4, line 45 - column 6, line 18 see column 7, line 20 - line 32</p>	1-15, 18-22
A	<p style="text-align: center;">---</p> <p>US 5 594 795 A (DENT PAUL W ET AL) 14 January 1997 see column 1, line 19 - column 2, line 52</p> <p style="text-align: center;">-----</p>	13,16-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

In tional Application No

PCT/SE 98/01552

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0777394	A	04-06-1997	JP	10004432 A	06-01-1998
US 5594795	A	14-01-1997	AU	692288 B	04-06-1998
			AU	3092095 A	25-01-1996
			BR	9508228 A	28-10-1997
			EP	0769237 A	23-04-1997
			FI	970046 A	07-01-1997
			JP	10502507 T	03-03-1998
			NZ	290238 A	26-06-1998
			WO	9601546 A	18-01-1996

This Page Blank (uspto)